



WOOD STOVES

REGENCY-FIRE.COM



WHY CHOOSE REGENCY?

At Regency, our past 40 years have been focused on providing a high-level of service while building high-quality and reliable products that our customers can enjoy for years to come.

HIGH-QUALITY

Producing a high-quality product has been at the very heart of what we do; from when that very first stove rolled off the production line over 40 years ago to today. We are ever-focused on producing quality products for our customers that will last for years to come.

BEST WARRANTY

A fireplace should be reliable and should work right the first time it is used, and the 1,000th. A core part of our business is making sure that we are building long-lasting, durable, high-quality products. We back-up that commitment with the industry's best warranty on all our products.

COST-EFFICIENT

Never before have home heating costs been higher. Turn your furnace way down and zone heat with our beautiful, reliable and convenient Regency products. Not only can you cut your fuel bills in half, but you'll be able to enjoy the timeless comfort of a Regency fire.

Why Regency? Because it's more than a fireplace!



TABLE OF CONTENTS

Regency Classic™ Wood Stoves F1150 & F2450	06
Regency Cascades™ Wood Stoves F1500 & F2500	08
Regency Pro-Series™ Wood Stoves F3500 & F5200	10
Technology	12
Accessories	14
Specifications	15





renewable • affordable • beautiful



REGENCY WOOD STOVES



ECO-FRIENDLY

Regency Wood Stoves are EPA 2020 Certified so you burn less wood, produce fewer emissions, and get longer burns while keeping your home warm all year long.



HIGHLY EFFICIENT

Using more of the wood's available energy means less loading, less chopping, less effort, and most importantly less money spent on wood! Save money with highly efficient Regency wood products.



INDUSTRY'S BEST WARRANTY

Every product is backed up with our lifetime limited warranty, and our hybrid products offer a 10-year, 100% warranty on the original combustor. The most comprehensive, transparent warranty in the industry.



QUALITY, DURABLE PRODUCTS

Regency wood products are manufactured right here in North America using high-quality thick gauge steel. All Regency products are designed from the ground up to be durable and to last generations.



ECO BOOST - TRIPLE BURN TECHNOLOGY

Triple stage burn technology delivers a system of high efficiency, clean combustion & maximum heat control, all with less wood, less loading & less effort.



F1150 shown with nickel accent door & pedestal base (rear heat deflector not shown).

REGENCY CLASSIC™ | F1150 Small Non-Catalytic Wood Stove

The Regency Classic small wood stove is perfect for smaller spaces, or for those needing to supplement their current heating system. Its compact footprint does not disappoint in heating capacity; burning efficiently from one load of wood.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Wood-finished handle
- Heavy duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front mounted air adjustment
- Air operating safety tool
- High performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge steel log retainers to stop logs from rolling
- Welded ash lip will never bend or break
- Rear heat deflector allowing for closer clearances
- Mobile home and alcove approved

OPTIONS

- Cast iron door with heat radiating ceramic glass in black or nickel accent
- Pedestal base
- Bottom heat shield with cast iron legs in black or brushed nickel
- Ash drawer with cover
- Variable speed blower
- Convector airmate
- Outside air kit
- Mobile home kit (Canada only)

SPECIFICATIONS

Maximum BTU*	55,000
Typical sq. ft. heated**	600 - 1,200
Efficiency (EPA LHV)	75%
Max log size	18"
Burn time	Up to 8 hours
Emissions	1.7 g/h
Firebox size	1.3 cu. ft.
Flue size	6"

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 15 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.



F2450 shown with nickel accent door, bottom heat shield & brushed nickel legs (rear heat deflector not shown).

REGENCY CLASSIC™ | F2450 Medium Non-Catalytic Wood Stove

This Regency Classic medium wood stove provides the perfect amount of heat for most spaces. Load wood in this stove front to back or side to side for the optimum convenience.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Wood-finished handle
- Heavy duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front mounted air adjustment
- Air operating safety tool
- High performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Welded ash lip will never bend or break
- Rear heat deflector allowing for closer clearances
- Mobile home and alcove approved

OPTIONS

- Cast iron door with heat radiating ceramic glass in black or nickel accent
- Pedestal base
- Bottom heat shield with cast iron legs in black or brushed nickel
- Ash drawer with cover
- 2 speed blower
- Convector airmate
- Outside air kit
- Mobile home kit (Canada only)

SPECIFICATIONS

Maximum BTU*	75,000
Typical sq. ft. heated**	1,000 - 2,200
Efficiency (EPA LHV)	78%
Max log size	18"
Burn time	Up to 10 hours
Emissions	2.3 g/h
Firebox size	2.3 cu. ft.
Flue size	6"

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 15 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.



F1500 shown with nickel accent door, bottom heat shield & black legs.

REGENCY CASCADES™ | F1500 Small Hybrid Wood Stove

The Regency Cascades F1500 small wood stove featuring Eco-Boost triple burn technology is a highly-efficient heater in a compact body that delivers exceptional heating capacity, long burn times, and low emissions.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Wood-finished handle
- Heavy duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front mounted air adjustment & catalytic bypass
- Air & bypass safe operation tool
- Easy-to-read catalytic thermometer helps your stove reach maximum burn times & efficiency
- High performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge steel log retainers to stop logs from rolling
- Welded ash lip will never bend or break
- Rear heat deflector allowing for closer clearances
- Mobile home and alcove approved
- 10-year, 100% coverage on original catalyst

OPTIONS

- Cast iron door with heat radiating ceramic glass in black or nickel accent
- Pedestal base
- Bottom heat shield with cast iron legs in black or brushed nickel
- Ash drawer with cover
- Variable speed blower
- Convector airmate
- Outside air kit
- Mobile home kit (Canada only)

SPECIFICATIONS

Maximum BTU*	55,000
Typical sq. ft. heated**	600 - 1,200
Efficiency (EPA LHV)	84%
Max log size	18"
Burn time	Up to 10 hours
Emissions	1.0 g/h
Firebox size	1.3 cu. ft.
Flue size	6"

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 15 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.



F2500 shown with black door, pedestal & airmate.

REGENCY CASCADES™ | F2500 Medium Hybrid Wood Stove

The Regency Cascades F2500 delivers the same great looks as the F2450 with the addition of triple burn hybrid technology; delivering longer burn times, increased efficiency, and reducing emissions to an astonishing 1 gram/hour.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Wood-finished handle
- Heavy duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front mounted air adjustment & catalytic bypass
- Air & bypass safe operation tool
- Easy to read catalytic thermometer helps your stove reach maximum burn times & efficiency
- High performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Welded ash lip will never bend or break
- Rear heat deflector allowing for closer clearances
- Mobile home** and alcove approved
- 10-year, 100% coverage on original catalyst

**Approved in USA only

OPTIONS

- Cast iron door with heat radiating ceramic glass in black or nickel accent
- Pedestal base
- Bottom heat shield with cast iron legs in black or brushed nickel
- Ash drawer with cover
- 2 speed blower
- Convector airmate
- Outside air kit

SPECIFICATIONS

Maximum BTU*	78,000
Typical sq. ft. heated**	1,000 - 2,200
Efficiency (EPA LHV)	81%
Max log size	18"
Burn time	Up to 12 hours
Emissions	1.0 g/h
Firebox size	2.3 cu. ft.
Flue size	6"

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 15 for BTU calculation method.

**Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.



F3500 shown with airmate.

REGENCY PRO-SERIES™

F3500 Large Hybrid Wood Stove

Enjoy a full, roaring fire with strong heat or adjust the flame to enjoy lower heat and gorgeous glowing embers. The choice is yours!

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Heavy duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front mounted air adjustment & side mounted catalytic bypass
- Easy-to-read catalytic thermometer helps your stove reach maximum burn times & efficiency
- High performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Welded ash lip will never bend or break
- Rear heat deflector allowing for closer clearances
- Mobile home and alcove approved
- 170° opening door for easy loading
- Heavy duty 3/16 in. steel firebox
- 10-year, 100% coverage on original catalyst

OPTIONS

- Ash drawer with cover
- 2 speed blower
- Convector airmate
- Outside air kit
- Mobile home kit (Canada only)

SPECIFICATIONS

Maximum BTU*	75,000
Typical sq. ft. heated**	1,500 - 2,500
Efficiency (EPA LHV)	87%
Max log size	20"
Burn time	Up to 24 hours
Emissions	0.9 g/h
Firebox size	3.0 cu. ft.
Flue size	6"

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 15 for BTU calculation method.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.



F5200 shown with airmate.

REGENCY PRO-SERIES™ | F5200 Extra Large Hybrid Wood Stove

The F5200 wood stove lets you load an impressive 90 pounds of fuel. Its clean, classic design provides the perfect backdrop to the wide view cast door giving you a large fire view that will take your breath away!

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Heavy duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front mounted air adjustment & side mounted catalytic bypass
- Easy to read catalytic thermometer helps your stove reach maximum burn times & efficiency
- High performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Welded ash lip will never bend or break
- Rear heat deflector allowing for closer clearances
- Mobile home and alcove approved
- 170° opening door for easy loading
- Heavy duty 3/16 in. steel firebox
- 10-year 100% coverage on original catalyst

OPTIONS

- Ash drawer with cover
- 2 speed blower
- Convector airmate
- Outside air kit

SPECIFICATIONS


Maximum BTU*	80,000
Typical sq. ft. heated**	1,500 - 3,000
Efficiency (EPA LHV)	86%
Max log size	22"
Burn time	Up to 30 hours
Emissions	0.9 g/h
Firebox size	4.4 cu. ft.
Flue size	8"

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation. Refer to page 15 for BTU calculation method.
 ** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

WOOD TECHNOLOGY

CASCADES SERIES COMBUSTOR

Triple stage burn technology delivers a system of high efficiency, clean combustion & maximum heat control, all with less wood, less loading & less effort.

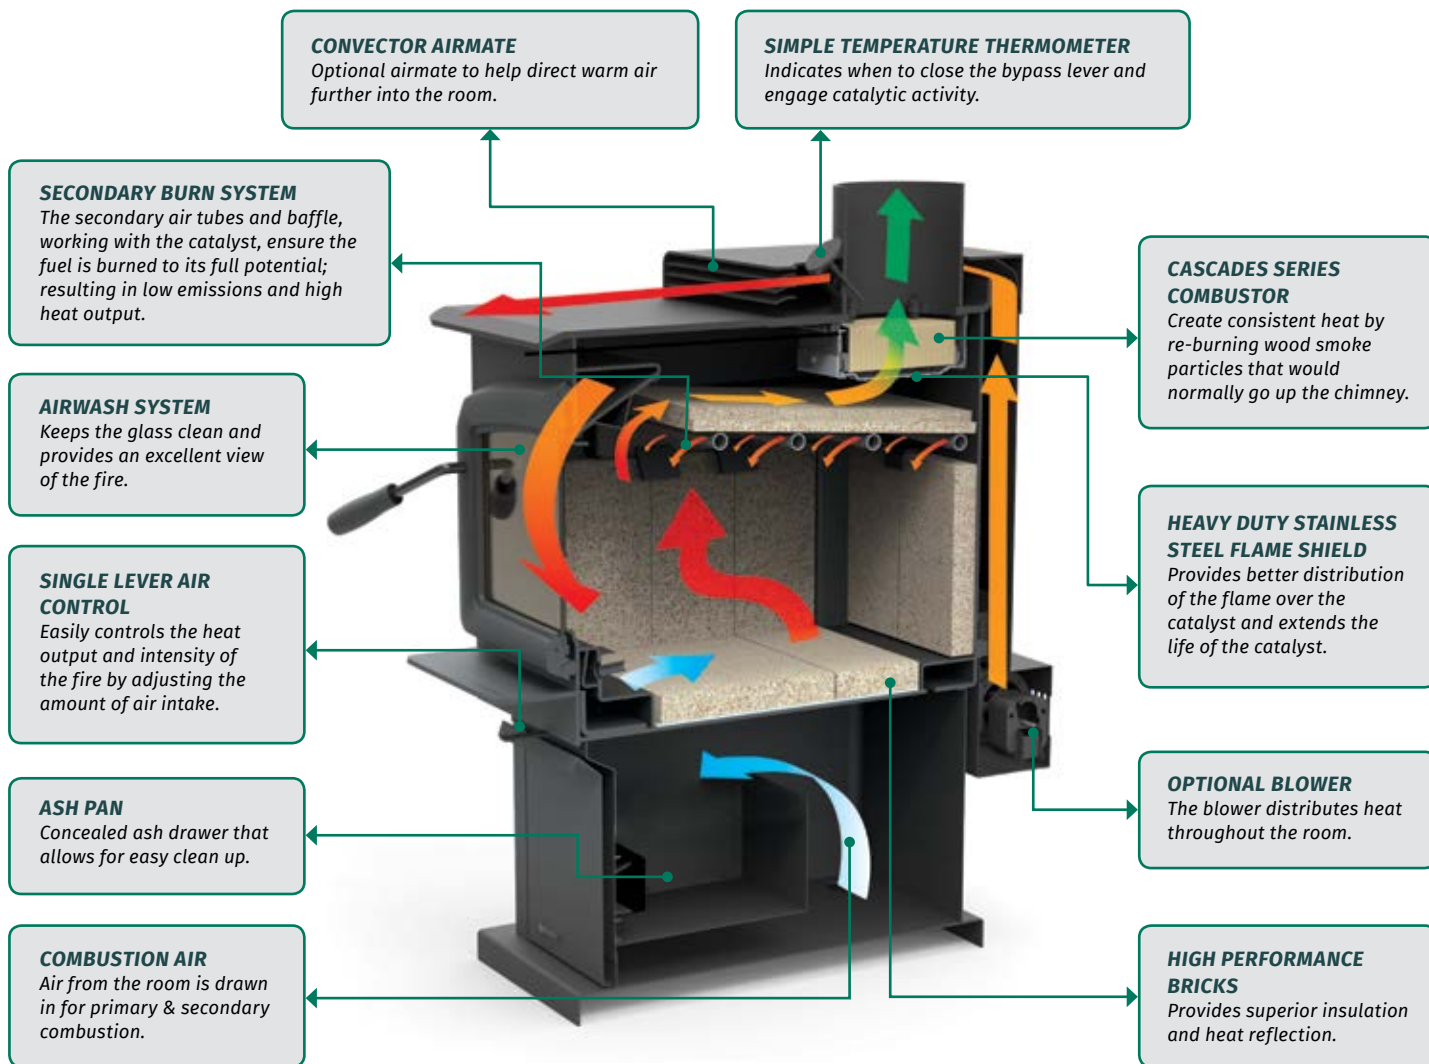

LEARN MORE ABOUT OUR
WOOD TECHNOLOGIES AT
regency-fire.com/videos




NOT SHOWN IN THE DIAGRAM

HEAVY DUTY CAM LATCH
Ensures airtight seal for controlled airflow.

WOOD TECHNOLOGY

PRO SERIES COMBUSTOR

With Eco-Boost technology you get more out of your wood. Offering some of the highest efficiencies available anywhere, the Eco-Boost system uses more of the available energy in the wood, resulting in less loading, loss chopping, and less hauling. The triple-stage burn significantly reduces emissions below EPA 2020 standards.

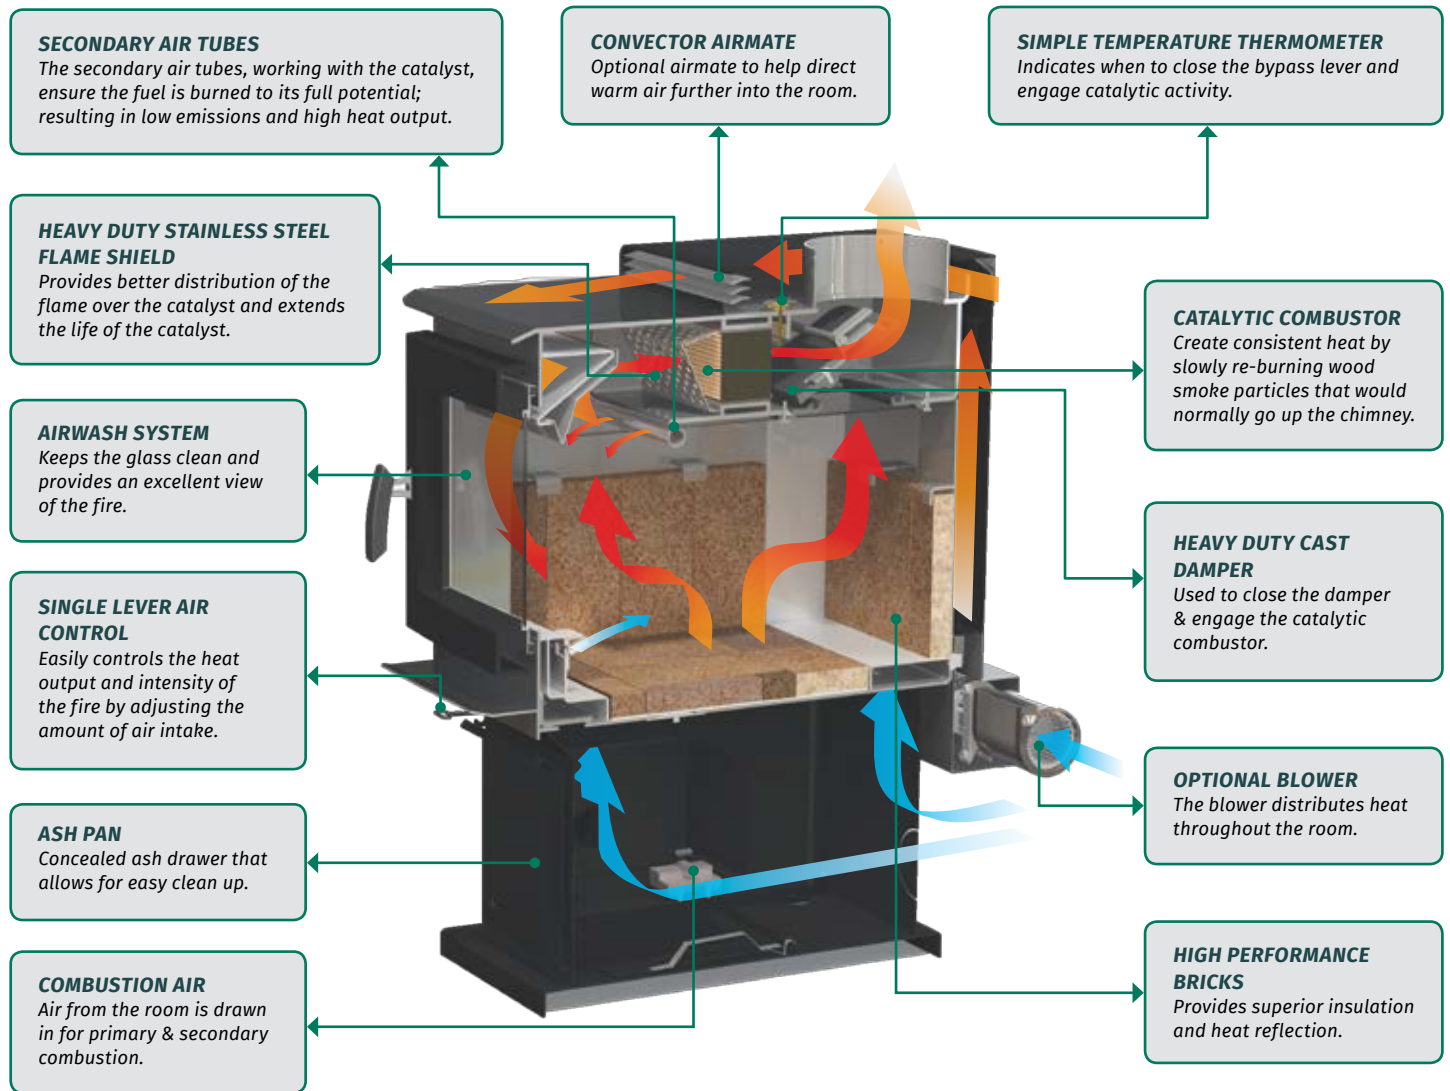

NOT SHOWN IN THE DIAGRAM


HEAVY DUTY CAM LATCH
Ensures airtight seal for controlled airflow.



LEARN MORE ABOUT OUR WOOD TECHNOLOGIES AT [regency-fire.com/videos](https://www.regency-fire.com/videos)

ACCESSORIES

CAST IRON DOORS *(Classic & Cascade Series only)*

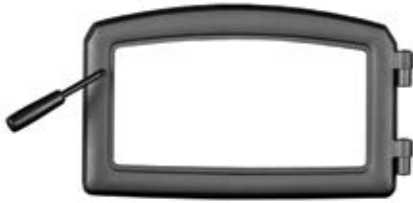

*Black cast iron door
(includes black hinge caps)*



*Nickel accent cast iron door
(includes nickel hinge caps)*

BASE OPTIONS



Brushed nickel cast iron legs
(Classic & Cascade Series only)*



Black cast iron legs
(Classic & Cascade Series only)*



*Black pedestal
(Included with the Pro-series)*

**bottom heat shield required*

CONVECTOR AIRMATE



The convector airmate scoops super heated air from the back and top of the stove and directs it to the living area in front. This heat dispersion reduces temperatures behind the unit and allows it to be installed even closer to the wall.

ASH DRAWER



The concealed and discrete ash drawer offers a convenient way to store your ashes. Use the included cover to keep the ash contained before it is disposed of outside.

SPECIFICATIONS RECAP

SPECIFICATIONS	F1150	F2450	F1500	F2500	F3500	F5200
Maximum BTU*	55,000	75,000	55,000	78,000	75,000	80,000
Typical sq. ft. heated**	600 - 1,200	1,000 - 2,200	600 - 1,200	1,000 - 2,200	1,500 - 2,500	1,500 - 3,000
Efficiency (EPA LHV)***	75%	78%	84%	81%	87%	86%
Max log size	18"	18"	18"	18"	20"	22"
Burn time* (up to)	Up to 8 hours	Up to 10 hours	Up to 10 hours	Up to 12 hours	Up to 24 hours	Up to 30 hours
Emissions	1.7 g/h	2.3 g/h	1.0 g/h	1.0 g/h	0.9 g/h	0.9 g/h
Firebox size	1.3 cu. ft.	2.3 cu. ft.	1.3 cu. ft.	2.3 cu. ft.	3.0 cu. ft.	4.4 cu. ft.
Flue size	6"	6"	6"	6"	6"	8"


* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.

** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.


*** EPA LHV = Lower Heating Value Efficiency - Actual measured efficiency as per CSA B415.1

BTU CALCULATION METHOD: Max BTUs are calculated by taking an average fillable volume of 95% of the stove's capacity, multiplied by 19.5 pounds per square foot and an average of 9100 BTUs per pound of wood. Factoring in the listed efficiency, 15% moisture content and dividing by the proven burn time at the high heat setting.


DIMENSIONS



FRONT (PEDESTAL)



FRONT (LEGS)

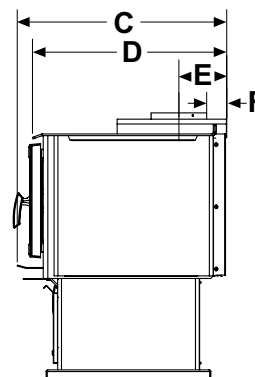


SIDE

UNITS	A	B	C	D	E	F	G
F1150	32-3/4"	24"	20"	17-3/8"	6-1/2"	--	32"
F2450	34-5/8"	24"	27-1/8"	24-13/16"	6-7/16"	--	33-7/8"
F1500	32-3/4"	24"	20"	17-3/8"	4-1/2"	--	32"
F2500	34-5/8"	24"	27-1/8"	24-13/16"	6-7/16"	--	33-7/8"
F3500	36"	26"	28"	25-5/8"	8-7/8"	5-3/4"	--
F5200	39-3/4"	29"	31-3/16"	28-15/16"	7-1/8"	3"	--

SPECIFICATIONS

MINIMUM CLEARANCE TO COMBUSTIBLE MATERIALS

Please read the section below carefully as clearances depend on whether the optional airmate convector or the rear heat deflector is installed on the stove. Measurements "From Unit" are from the top plate of the stove to a side wall or to a corner, and from the rear heat shield to a back wall.

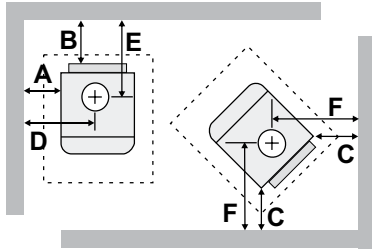

NOTE: Be aware that local Codes and Regulations may override some clearances listed in this manual. Check with your local inspector. Clearances to combustibles are for the safety of the property. To avoid overheating and damaging the appliance these clearances should be maintained for non-combustibles also.

RESIDENTIAL INSTALLATION "C" VENT (SINGLE WALL)		FROM UNIT		FROM CORNER		FROM FLUE CENTER-LINE	
		A	B	C	D	E	F
F1150	with AirMate or with Rear Deflector	13"	10-1/2"	9"	25"	17-1/16"	21"
F2450	with AirMate	16"	9-1/2"	8"	28"	16"	20"
	with Rear Deflector	16"	11-1/2"	8"	28"	18"	20"
F1500	with AirMate or with Rear Deflector	11"	10-1/2"	9"	23"	17-1/16"	21"
F2500	with AirMate	16"	8-1/2"	7"	28"	13-1/2"	19"
	with Rear Deflector	16"	10-1/2"	7"	28"	15-1/2"	19"
F3500	with AirMate or with Rear Deflector	11"	9-1/2"	8"	24"	16"	20-1/2"
F5200	Not approved						

MOBILE HOME CLOSE CLEARANCE (TO BE INSTALLED WITH REQUIRED PIPE COMPONENTS)

When the stove is installed as a close clearance residential unit, a listed double wall connector is required from the stove collar to the ceiling level.

MOBILE HOME CLOSE CLEARANCE (TO BE INSTALLED WITH REQUIRED PIPE COMPONENTS)		FROM UNIT		FROM CORNER		FROM FLUE CENTER-LINE	
		A	B	C	D	E	F
F1150	with AirMate or with Rear Deflector	11"	7"	5"	23"	13-9/16"	17"
F2450	with AirMate	15"	8"	6"	27"	14-1/2"	18"
	with Rear Deflector	15"	10"	6"	27"	16-1/2"	18"
F1500	with AirMate or with Rear Deflector	9"	5"	5"	21"	11-9/16"	17"
F2500	with AirMate	15"	7"	5"	27"	13-1/2"	17"
	with Rear Deflector	15"	9"	5"	27"	15-1/2"	17"
F3500	with AirMate or with Rear Deflector	11"	9-1/2"	8"	24"	16"	20-1/2"
F5200	with AirMate or with Rear Deflector	11"	10"	8"	25-1/2"	17-1/8"	22-1/2"


RESIDENTIAL CLOSE CLEARANCE (TO BE INSTALLED WITH REQUIRED PIPE COMPONENTS)

When the stove is installed as a close clearance residential unit, a listed double wall connector is required from the stove collar to the ceiling level.

RESIDENTIAL CLOSE CLEARANCE (TO BE INSTALLED WITH REQUIRED PIPE COMPONENTS)		FROM UNIT		FROM CORNER		FROM FLUE CENTER-LINE	
		A	B	C	D	E	F
F1150	with AirMate or with Rear Deflector	11"	7"	5"	23"	13-9/16"	17"
F2450	with AirMate	15"	8"	6"	27"	14-1/2"	18"
	with Rear Deflector	15"	10"	6"	27"	16-1/2"	18"
F1500	with AirMate or with Rear Deflector	9"	5"	5"	21"	11-9/16"	17"
F2500	with AirMate	15"	7"	5"	27"	13-1/2"	17"
	with Rear Deflector	15"	9"	5"	27"	15-1/2"	17"
F3500	with AirMate or with Rear Deflector	11"	9-1/2"	8"	24"	16"	20-1/2"
F5200	with AirMate or with Rear Deflector	11"	10"	8"	25-1/2"	17-1/8"	22-1/2"

MINIMUM ALCOVE CLEARANCE TO COMBUSTIBLE MATERIALS

The Regency® Freestanding models have been alcove approved and must be installed with a listed double wall connector to the ceiling level. Minimum alcove ceiling height: 83"




MINIMUM ALCOVE CLEARANCE		FROM UNIT		FROM FLUE CENTER-LINE		FROM WALL
		G	H	I	J	K
F1150	with AirMate or with Rear Deflector	11"	7"	23"	13-9/16"	46"
F2450	with AirMate	15"	8"	27"	14-1/2"	54"
	with Rear Deflector	15"	10"	27"	16-1/2"	54"
F1500	with AirMate or with Rear Deflector	9"	5"	21"	11-5/8"	46"
F2500	with AirMate	15"	7"	27"	13-1/2"	54"
	with Rear Deflector	15"	9"	27"	15-1/2"	54"
F3500	with AirMate or with Rear Deflector	11"	9-1/2"	24"	16"	60"
F5200	with AirMate or with Rear Deflector	11"	10"	25-1/2"	17-1/8"	63"

SPECIFICATIONS

FLOOR PROTECTION

USA FLOOR PROTECTION (CORNER INSTALLATION)	X	RESIDENTIAL "C" VENT		RESIDENTIAL CLOSE CLEARANCE		MOBILE HOME CLOSE CLEARANCE		ALCOVE	
		Y	Z	Y	Z	Y	Z	Y	Z
F1150	33-11/16"	40"	8"	40"	8"	40"	8"	40"	8"
F2450	33-11/16"	47"	8"	47"	8"	47"	8"	47"	8"
F1500	33-11/16"	40"	8"	40"	8"	40"	8"	40"	8"
F2500	33-11/16"	47"	8"	47"	8"	47"	8"	47"	8"
F3500	33"	46-1/2"	8"	46-1/2"	8"	46-1/2"	8"	46-1/2"	8"
F5200	36"	--	--	51-1/8"	8"	51-1/8"	8"	51-1/8"	8"

CANADA FLOOR PROTECTION (CORNER INSTALLATION)	X	RESIDENTIAL "C" VENT		RESIDENTIAL CLOSE CLEARANCE		MOBILE HOME CLOSE CLEARANCE		ALCOVE	
		Y	Z	Y	Z	Y	Z	Y	Z
F1150	33-11/16"	42"	8"	42"	8"	42"	8"	42"	8"
F2450	33-11/16"	49"	8"	49"	8"	49"	8"	49"	8"
F1500	33-11/16"	42"	8"	42"	8"	42"	8"	42"	8"
F2500	33-11/16"	49"	8"	49"	8"	49"	8"	49"	8"
F3500	33"	48-1/2"	8"	48-1/2"	8"	48-1/2"	8"	48-1/2"	8"
F5200	36"	--	--	53-1/8"	8"	53-1/8"	8"	53-1/8"	8"

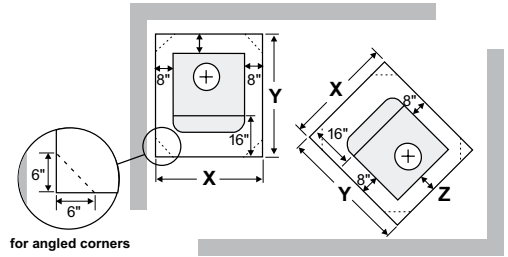

for angled corners


NOTE: In Canada, floor protection must extend 18" (457mm) to the front and 8" (203mm) to back of the stove. If the rear clearance to combustibles is less than 6" (for corner installations) the rear corners may be angled to take advantage of the closer clearances.

USA FLOOR PROTECTION CORNER HEARTH REQUIREMENTS	RESIDENTIAL "C" VENT				RESIDENTIAL CLOSE CLEARANCE			
	L	M	N	O	L	M	N	O
F1150	33-11/16"	55-3/16"	46-11/16"	22-7/8"	33-11/16"	49-1/2"	42-11/16"	18-7/8"
F2450	33-11/16"	60-7/8"	50-3/4"	26-7/8"	33-11/16"	58-1/16"	48-3/4"	24-7/8"
F1500	33-11/16"	55-3/16"	46-11/16"	22-7/8"	33-11/16"	49-1/2"	42-11/16"	18-7/8"
F2500	33-11/16"	59-7/16"	49-3/4"	25-7/8"	33-11/16"	55-15/16"	47-1/4"	23-7/16"
F3500	33"	63"	56-1/8"	24-5/16"	33"	63"	56-1/8"	24-5/16"
F5200	Not approved				36"	67-1/2"	56-1/4"	30-3/4"

Reference only when hearth pad is installed to rear wall at minimum pipe clearances.

CANADA FLOOR PROTECTION CORNER HEARTH REQUIREMENTS	RESIDENTIAL "C" VENT				RESIDENTIAL CLOSE CLEARANCE			
	L	M	N	O	L	M	N	O
F1150	33-11/16"	57-3/16"	48-1/16"	24-1/4"	33-11/16"	51-1/2"	44-1/16"	20-1/4"
F2450	33-11/16"	62-7/8"	52-1/8"	28-5/16"	33-11/16"	60-1/16"	50-1/8"	26-5/16"
F1500	33-11/16"	57-3/16"	48-1/16"	24-1/4"	33-11/16"	51-1/2"	44-1/16"	20-1/4"
F2500	33-11/16"	61-7/16"	51-1/8"	27-5/16"	33-11/16"	57-15/16"	48-5/8"	24-13/16"
F3500	33"	65"	57-9/16"	25-3/4"	33"	65"	57-9/16"	25-3/4"
F5200	Not approved				36"	69-1/2"	57-5/8"	32-3/16"

Reference only when hearth pad is installed to rear wall at minimum pipe clearances.

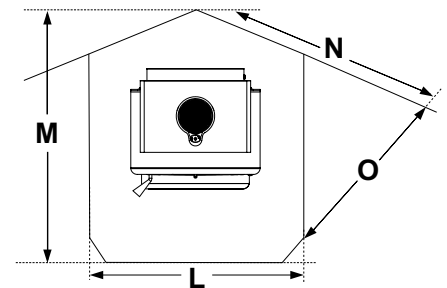

DISCLAIMER: Please always refer to the manual for the latest up to date installation details.

DESIGN INSPIRATION

“

Great products, North American made, good customer service! Our wood stove keeps us warm and cozy all winter.



CHARLENE L. – GOOGLE REVIEW

”



“

We recently replaced a clunky, unattractive, barely functional gas fireplace with a stylish, elegant, wonderfully efficient Regency wood stove, and we couldn't be happier. It heats virtually our entire 2,200 sq. ft. 2-story for hours with as few as 4 good logs. We are impressed with its design, its appearance, and are very pleased with its performance. We can't recommend it too highly.



ERIKA P. – GOOGLE REVIEW

”



READY TO BUY



GUARANTEED QUALITY - BEST INDUSTRY WARRANTY

All Regency Fireplaces are manufactured in North America in our state-of-the-art manufacturing facility. When choosing to purchase a Regency wood stove you are choosing high quality craftsmanship, top-tier materials, and industry leading support!

Add the warmth and comfort of a fireplace to your home, create memories that will last a lifetime, and rest-easy knowing that your Regency wood stove is backed by the best warranty in the industry.


Every product is backed up with our lifetime limited warranty, and our hybrid products offer a 10-year, 100% warranty on the original combustor. The best in the industry!





regency-fire.com

Your Regency Dealer



©2020 FPI Fireplace Products International Ltd. Regency®, Regency Cascades™, Regency Classics™, Regency Pro-Series™, and Hampton® are registered or proprietary trademarks of FPI Fireplace Products International Ltd. All rights reserved. Printed in Canada (03/20)
Part no. 944-438